

USB Charge UE24WCP2-M2

Features

- ◆ Wide range of AC input voltage 90-264VAC
- ◆ Protections against: short circuit/over current/over voltage
- ◆ Can charge 2 devices at the same time through 2 individual outputs
- ◆ Changeable AC plugs for universal use
- ◆ Meets energy star level VI



Input Voltage Range	90-264VAC	Operation Temperature	0~40°C
Input Current	1.0A	Storage Temperature	-20~60°C
Average Efficiency	Meets energy star level VI	Humidity	5% to 95% non condensing
Output Voltage Range	±5%	MTBF	50,000 hours at full load at 25°C ambient, calculated per MIL-HDBK-217
Standby Power	小于 0.1W		
Safety Standard	CE(EN60950)、CCC(GB4943)、GS (EN60950)、NRTL(UL60950)、KC(K60950)、TUV-PSE(J60950)、CB (IEC60950)、cULus(UL60950)		
Weight	UE24WCP2-M2:98.6g	Dimensions	UE24WCP2-M2: 72.5mm (L) ; 53.5mm (W) ; 34.5mm (H)
			UE24WCP2-M4: 75.2mm (L) ; 53.6mm (W) ; 33mm (H)
Applications	Mobile Phone, ITE Equipment		

Output data (UE24WCP2-M2)




Model	USB Port	Voltage (V)	Current (A)	Ripple (mV)	V		Av. Eff (%)
					115	230	
UE24WCP2-050240SPC-M2	USB1	5.0	0.1-2.4	200	Y	Y	80
	USB2	5.0	0.1-2.4	200	Y	Y	80

Standard

EMC standard	EN55022/CISPR22; EN55024/CISPR24
Conducted & Radiated	EN55022/CISPR22 Class B
Harmonic Currents	IEC/EN 61000-3-2 Class A
Voltage Flicker	IEC/EN 61000-3-3
ESD	IEC/EN 61000-4-2 ±8kV Air, ±4kV Contact
Radiated Immunity	IEC/EN 61000-4-3 3V/m
EFT/Burst	IEC/EN 61000-4-4 ±1kV
Surge	IEC/EN 61000-4-5 ±2kV diff. mode, ±2kV common Mode
Conducted Immunity	IEC/EN 61000-4-6 3Vrms
Dips & Interruptions	IEC/EN 61000-4-11 0%, 70%, 0% of UT

Mechanical Drawings

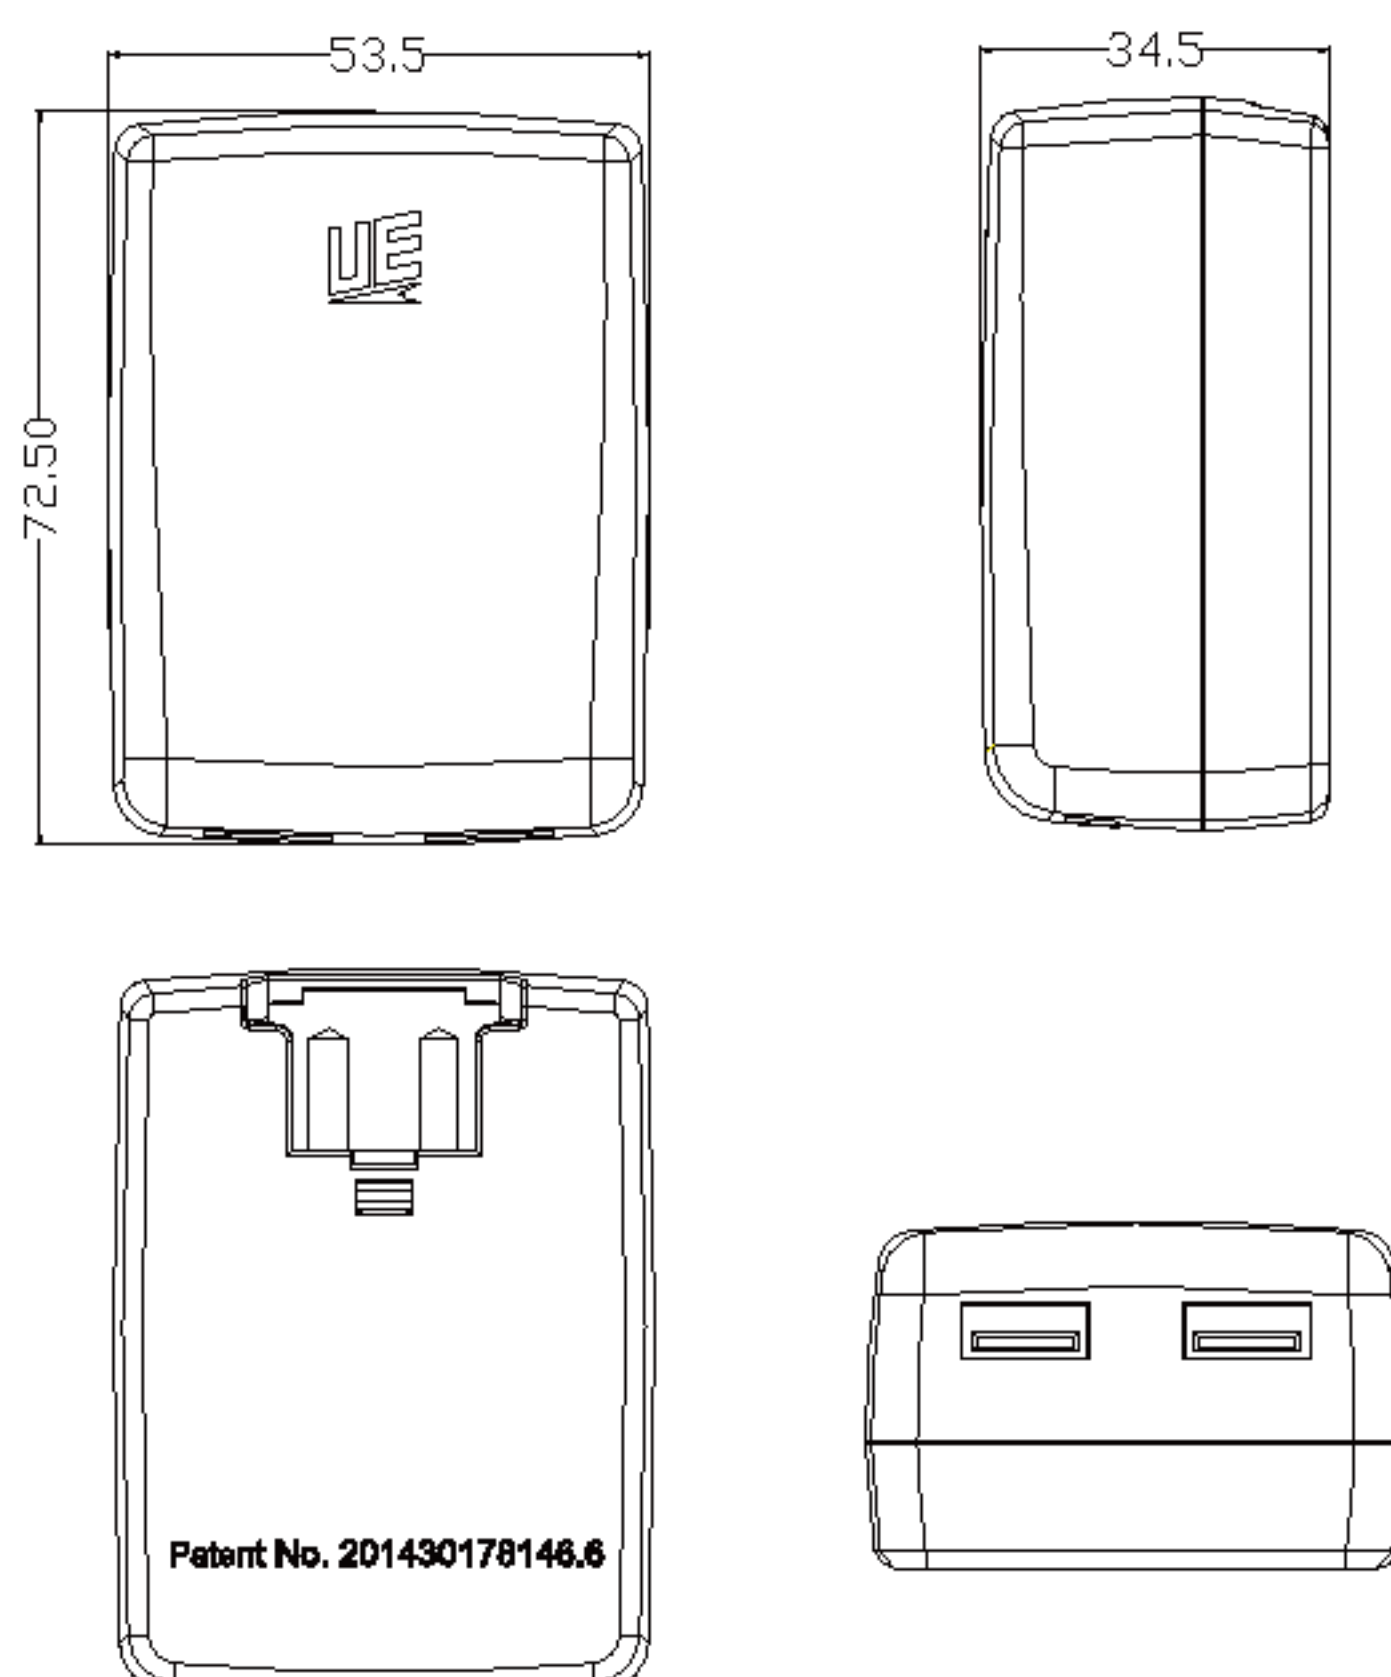

UE24WCP2-M2